


Technical details

Model Name	DL3100	
Printing Technology	Bi-directional with logical seeking	
Print Head	24 wire, Impact Dot Matrix	
Wire Diameter	Standard	Φ0.20mm
Printing columns (10cpi)	80 column	
Speed	High Draft Quality	450cps (10cpi)
	Draft Quality	300cps (10cpi)
	Letter Quality	120cps (10cpi)
Resolution	360 x 360 dpi *1	
Copy Ability	Original + 5 carbonless copies *3	
Max. paper thickness	0.52mm (0.0204")	
Line Feed Speed	60ms per 1/6" line	
Form Feed Speed	4" per second continuous feed	
Continuous Form/Cut Sheet switch function	Manual	
Paper thickness adjust function	Manual	
Interface	USB	USB Ver.2.0 (TYPE B)
	Parallel	IEEE1284 Nibble Mode
	Serial	RS232C 25pin
	LAN	10BASE-T, 100 Base-TX, TCP/IP Protocol
Emulation	Fujitsu DPL24C PLUS, Epson ESC/P2, IBM ProPrinter	
Printer Driver	Microsoft Windows Driver Available	
Input Buffer	Max. 256KB	
Input Voltage	100V AC to 120V AC ±10%, single phase, 50Hz to 60Hz	
	200V AC to 240V AC ±10%, single phase, 50Hz to 60Hz	
Consumption Power	Stand by	1.4W or Less
	Average	34W
Environmental Conditions	5°C to 35°C(41°F to 95°F), 10~80%RH (Non-condensing)	
Dimension (WxDxH)	369 x 283 x 130mm	
Weight	Approx. 5.5Kg	
Noise	Approx. 57dBA / 55dBA(Low noise mode)	
Reliability	MTBF	20,000H(25% duty cycle)
	MTTR	0.34H
	Printer Life	5 million Line-Feed or 5 years
Print Head	Print Head Life	400million strokes (each wire)
Ink Ribbon	Ribbon Life (Black)	7 million characters (ANK Draft Quality)
Safety and EMI standard	For Europe, North America and Asia Pacific	

Common			
Paper feeding	Continuous Form	Push tractor Rear in, and Top out	
	Cut Sheet	Rear in and Top out	
Paper	Cut Sheet	Width	95~267mm (3.75" ~ 10.5")
		Length	114.3mm~363.2mm(4.5"~14.3")
	Continuous Form	Width	95mm~276mm (3.75"~10.5")
		Length	1143mm~558.8mm(4.5"~22.0")
Character Sets	US_ASCII, UK_ASCII, German, French, Italian, Norwegian, Swedish, Spanish CP 437, CP 850, CP 851, CP 852, CP 857, CP 858, CP 860, CP 861, CP 863, CP 864 CP 864 Extended, CP 865, CP 866 Cyrillic, CP 866 Bulgaria, CP 737, 8859-1 8859-1 (SAP), 8859-2, 8859-5, 8859-7, 8859-9, Mazovia, 8859-15, Kamenicky Code 3 of 9, UPC Type A, UPC Type A with check character, EAN13, EAN8, Interleaved 2 of 5, Code 128, POSTNET		
Barcode	Code 3 of 9, UPC Type A, UPC Type A with check character, EAN13, EAN8, Interleaved 2 of 5, Code 128, POSTNET		
Resident Fonts	Bitmap Fonts : Roman, Sans Serif, Courier, Prestige OCR-B OCR-A, Orator, SOUVENIR, GOTHIC, Script, Draft, HS-Draft		

Model	
Interface type	USB USB+Parallel USB+Serial USB+LAN

*1 Maximum Graphics Resolution, Under ESC/P Emulation only
 *2 About the trade mark
 *3 Maximum copy ability is "Original + 5 carbonless copies" under specific paper conditions.
 Company names and product names mentioned above are registered trade marks or trade marks of each company.
 -Specifications are subject to change without notice.

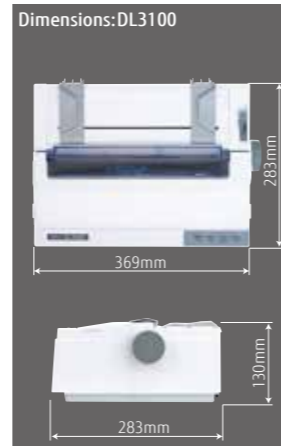

ForefrontTechnologies


Jebel Ali Free Zone, Dubai (HO)
 Street No. N503 - FD03, FD04
 United Arab Emirates
 P.O. Box 17020
 Tel: +971 (4) 881 44 40
 Fax: +971 (4) 881 42 42

Al Olaya Street, Riyadh (BO)
 Akariyah-3 Building, Office 610
 Kingdom of Saudi Arabia
 P.O. Box 301807, Riyadh 11372
 Tel: +966 (11) 460 35 80
 Fax: +966 (11) 460 35 85

www.forefrontec.com
 info@forefrontec.com

FUJITSU ISOTEC LIMITED
 Printer Business Division
 135, Higashinozaki, Hobaru-machi,
 Date-shi, Fukushima
 960-0695, JAPAN.
 Phone : +81-24-574-2236
 Fax : +81-24-574-2382
 URL : http://www.fujitsu.com/
 jp/fit/en/
 Contact E-mail :
 fit-gsm@cs.jp.fujitsu.com

FUJITSU Printer DL3100

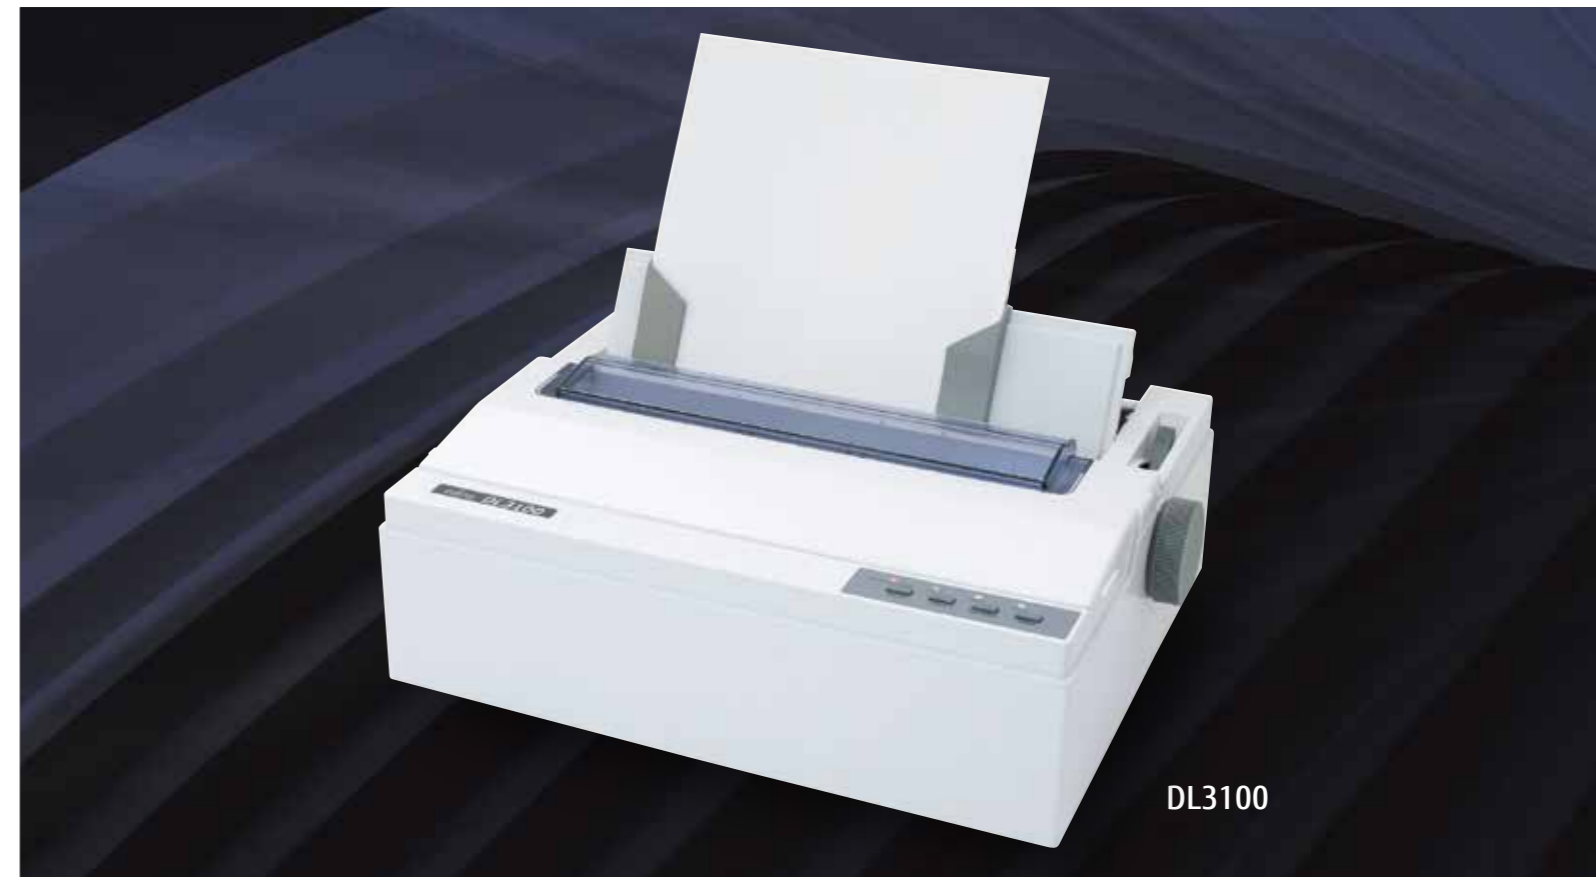

- Evolving the multi-purpose dot matrix printer**
- 24 wire dot matrix printer
 - Achieves incredible reliability
 - Wide connectivity through different printer models
 - Stylish compact design
 - Amazing multi-copy capability

Best fit for your business partner



FUJITSU professional hardware




Variety of Paper Types

- Stock Forms (3.75 inch - 10.5 inch width)
- Cut Sheet Papers (3.75 inch - 10.5 inch width)
- Carbon Backed Papers. (2P - 6P)
(Maximum copy ability is 6P under specific paper conditions.)



High speed printing

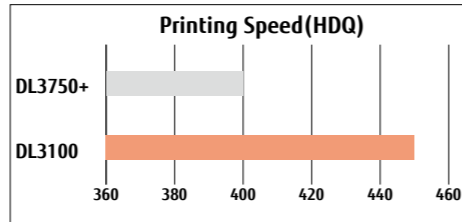

The maximum print speed is up to 450 cps at 10 cpi. This is achieved through the advanced head control technology.

Flexible connectivity ~ Interface support ~

~ Various interface model ~
Standard Interface is USB.
There are each interface model suitable for business as follows.

	Interface Type			
	USB	Centro	RS-232C	LAN
Standard model	✓			
Centro model	✓	✓		
RS-232C model	✓		✓	
LAN model	✓			✓

(*Interface type is the factory option. It can't change the interface type.)



USB



USB and Centro




USB and LAN



USB and RS-232C

Compact design

The design of DL3100 was completely reviewed all the component. DL3100 is achieved the compactness without any performance degradation

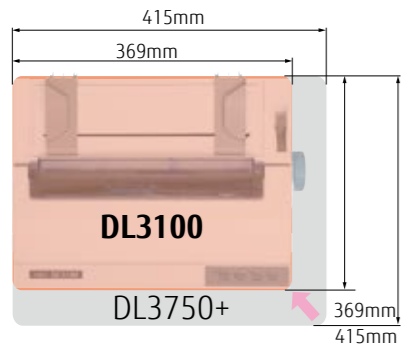

DL3100
369mm(W) x 283mm(D)

DL3750+
415mm(W) x 330mm(D)

24% smaller than the current model.

Easy operation

- High Impact for Multiple Carbon Copies
The multiple carbon copies is up to 6 copies (1 original + 5 copies).
By this capability, DL3100 series covers the various business applications
Gap lever is easy to access and the setting change is easy.



24pins Print Head



Gap Lever




Paper Select Lever

- Paper source selection
It is easy to select the paper source between the cut sheet and the continuous paper.

FUJITSU ECO Friendly and Reliability

Energy saving


~ ECO & Saving printer's cost ~
DL3100 Series comply with the New Energy Star Program.
Also, The power consumption is 1.1W or less at the waiting mode and 37W or less at the operation (Average)

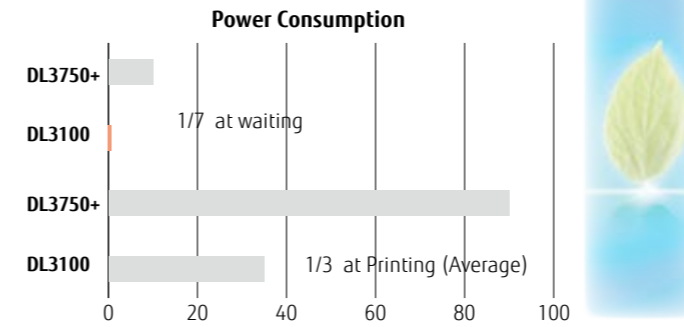

Reduced Operation Costs

~ Minimum run cost ~
Save money and reduce waste by using Fujitsu's ribbon. Ribbon replacement is quick and easy and does not require any tools.

Comparison of running cost per A4 page

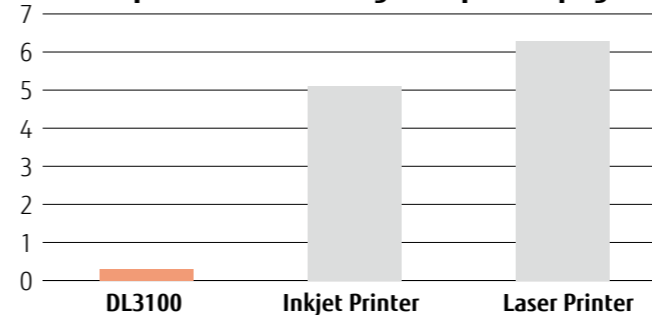

(*According to our calculations)

SIDM << Laser << Inkjet
0.3\$ 5.1\$ 6.3\$

The consumable costs per page are up to 20 time less than that of other printer types.
(SIDM : Serial Impact Dot Matrix Printer)




High reliability



Fujitsu printers are known for their reliability and longevity.
DL3100 series was extensively tested to ensure they meet Fujitsu's quality standards, and are ISO9001 certified

Covering safety standard for each region

~ Appropriate printer for international Business ~
FUJITSU Products covers safety standard for each region.
(*Safety standard is different depending on product)

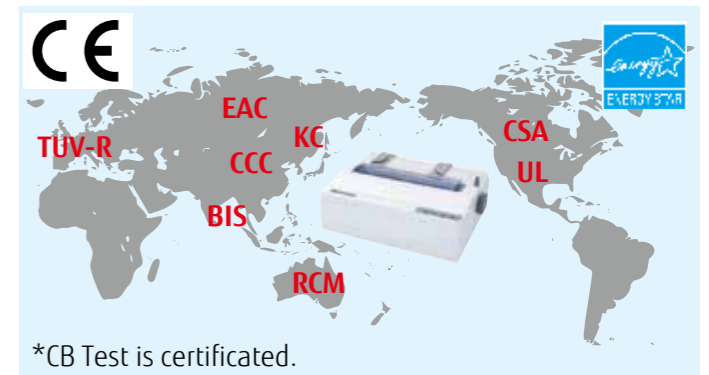

*CB Test is certificated.

- More over, DL3100 series obtain the standards which are advantage for your business.
- Energy Star V2.0 Program and ErP Lot 6 framework
DL3100 series comply with the Energy Star V2.0 Program and ErP Lot 6 Framework
 - Not containing Hazardous Substances
The DL3100 series is RoHS compliant and comply with Fujitsu's own strict environmental protection standards.
 - Eco Mark Program
DL3100 series comply with the Eco Mark Program

